

<b>BOAT</b> Name <b>WINGS</b> Sail Nr <b>USA 68750</b>	<b>GPH</b> <b>556.4</b>	<b>HULL</b> Length Overall <b>12.190m</b> Maximum Beam <b>3.746m</b> Displacement <b>6,237kg</b> Draft <b>2.367m</b> Plan Review IMS Reg. Division <b>Performance</b> Dynamic Allowance <b>0.000%</b> Hull Construction <b>Cored</b> Carbon Rudder <b>No</b> Crew Arm Extension
<b>GENERAL</b> Class <b>J 121</b> Designer <b>JOHNSTONE</b> Builder <b>CCF</b> Series <b>06/2020</b> Age <b>01/2021</b> Age Allowance <b>0.000%</b> Offset File <b>J121LK.OFF - 15/01/2021 16:31:16</b> Measurement by - <b>10/01/2021</b>		IMSLS <b>11.709m</b> VCGD <b>-0.125m</b> Sink <b>24.16kg/mm</b> RL <b>10.759m</b> VCGM <b>-0.118m</b> WS <b>31.15m<sup>2</sup></b> LSM0 <b>11.517m</b> Displacement/Length ratio <b>4.0828</b>



**ORC**  
Offshore Racing Congress  
World leader in rating technology

**2020**  
ORC International  
Certificate

**Rating Office**

Offshore  
Racing  
Congress



<b>SCORING OPTIONS</b>						
	<b>COASTAL / LONG DISTANCE</b>			<b>WINDWARD / LEEWARD</b>		
Time on Distance	<b>541.3</b>			<b>611.3</b>		
Time on Time	<b>1.1084</b>			<b>1.1042</b>		
Triple Number	Low	Medium	High	Low	Medium	High
Time on Distance	<b>640.4</b>	<b>491.8</b>	<b>436.4</b>	<b>835.3</b>	<b>610.0</b>	<b>535.1</b>
Time on Time	<b>1.0541</b>	<b>1.3726</b>	<b>1.5469</b>	<b>0.8081</b>	<b>1.1066</b>	<b>1.2615</b>

<b>TIME ALLOWANCES</b>							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat VMG	<b>964.9</b>	<b>786.1</b>	<b>685.5</b>	<b>643.8</b>	<b>628.6</b>	<b>622.2</b>	<b>606.3</b>
52°	<b>630.1</b>	<b>523.5</b>	<b>472.2</b>	<b>454.9</b>	<b>448.6</b>	<b>445.3</b>	<b>438.5</b>
60°	<b>595.1</b>	<b>500.2</b>	<b>460.3</b>	<b>443.8</b>	<b>436.0</b>	<b>431.7</b>	<b>425.5</b>
75°	<b>554.4</b>	<b>472.0</b>	<b>445.4</b>	<b>432.5</b>	<b>417.8</b>	<b>408.1</b>	<b>399.7</b>
90°	<b>536.5</b>	<b>461.8</b>	<b>433.4</b>	<b>412.6</b>	<b>398.5</b>	<b>388.2</b>	<b>370.3</b>
110°	<b>558.5</b>	<b>465.3</b>	<b>431.4</b>	<b>411.3</b>	<b>385.1</b>	<b>362.1</b>	<b>331.6</b>
120°	<b>570.4</b>	<b>470.8</b>	<b>433.6</b>	<b>403.9</b>	<b>380.5</b>	<b>363.7</b>	<b>321.8</b>
135°	<b>645.5</b>	<b>508.4</b>	<b>451.9</b>	<b>421.9</b>	<b>390.8</b>	<b>360.1</b>	<b>304.2</b>
150°	<b>767.5</b>	<b>609.8</b>	<b>508.5</b>	<b>455.1</b>	<b>432.1</b>	<b>407.4</b>	<b>349.2</b>
Run VMG	<b>886.2</b>	<b>704.1</b>	<b>587.2</b>	<b>525.4</b>	<b>498.7</b>	<b>470.4</b>	<b>403.2</b>

**Certificate**  
Number **US6738**  
ORC Ref **0341000TRD**  
Issued On **15/01/2021**  
VPP Ver. **2020 1.02**  
Valid until **31/01/2021**

**Crew Weight**  
Default **842kg**  
Maximum **720kg**  
Minimum\* **540kg**  
*\*when applied by the NoR and SI*  
Non Manual Pwr **No**

**Special Scoring**  
ToD ToT  
Non Spin GPH **603.4 0.9944**  
Non Spin OSN **585.4 1.0249**

<b>Selected Courses</b>							
Windward / Leeward	<b>925.6</b>	<b>745.1</b>	<b>636.3</b>	<b>584.6</b>	<b>563.7</b>	<b>546.3</b>	<b>504.8</b>
Circular Random	<b>768.9</b>	<b>619.3</b>	<b>539.5</b>	<b>493.5</b>	<b>464.8</b>	<b>444.6</b>	<b>413.6</b>
Coastal / Long Distance	<b>921.6</b>	<b>698.2</b>	<b>574.1</b>	<b>508.6</b>	<b>477.0</b>	<b>449.9</b>	<b>396.8</b>
Non Spinnaker	<b>853.3</b>	<b>679.3</b>	<b>584.0</b>	<b>527.5</b>	<b>492.0</b>	<b>468.2</b>	<b>436.6</b>

**Sails Limitations**  
Headsails **6** Spinnakers **4**

<b>Velocity Prediction in Knots for True Wind Speeds</b>							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat Angles	<b>43.1°</b>	<b>41.6°</b>	<b>40.5°</b>	<b>38.8°</b>	<b>37.9°</b>	<b>37.5°</b>	<b>37.4°</b>
Beat VMG	<b>3.73</b>	<b>4.58</b>	<b>5.25</b>	<b>5.59</b>	<b>5.73</b>	<b>5.79</b>	<b>5.94</b>
52°	<b>5.71</b>	<b>6.88</b>	<b>7.62</b>	<b>7.91</b>	<b>8.03</b>	<b>8.08</b>	<b>8.21</b>
60°	<b>6.05</b>	<b>7.20</b>	<b>7.82</b>	<b>8.11</b>	<b>8.26</b>	<b>8.34</b>	<b>8.46</b>
75°	<b>6.49</b>	<b>7.63</b>	<b>8.08</b>	<b>8.32</b>	<b>8.62</b>	<b>8.82</b>	<b>9.01</b>
90°	<b>6.71</b>	<b>7.79</b>	<b>8.31</b>	<b>8.73</b>	<b>9.03</b>	<b>9.27</b>	<b>9.72</b>
110°	<b>6.45</b>	<b>7.74</b>	<b>8.34</b>	<b>8.75</b>	<b>9.35</b>	<b>9.94</b>	<b>10.86</b>
120°	<b>6.31</b>	<b>7.65</b>	<b>8.30</b>	<b>8.91</b>	<b>9.46</b>	<b>9.90</b>	<b>11.19</b>
135°	<b>5.58</b>	<b>7.08</b>	<b>7.97</b>	<b>8.53</b>	<b>9.21</b>	<b>10.00</b>	<b>11.83</b>
150°	<b>4.69</b>	<b>5.90</b>	<b>7.08</b>	<b>7.91</b>	<b>8.33</b>	<b>8.84</b>	<b>10.31</b>
Run VMG	<b>4.06</b>	<b>5.11</b>	<b>6.13</b>	<b>6.85</b>	<b>7.22</b>	<b>7.65</b>	<b>8.93</b>
Gybe Angles	<b>143.0°</b>	<b>146.0°</b>	<b>146.5°</b>	<b>151.3°</b>	<b>150.5°</b>	<b>147.0°</b>	<b>143.3°</b>

**Class Division Length**  
CDL = **11.227**

**Storm Sails Areas**  
Heavy Weather Jib **32.96**  
Storm Jib (JL=10.16) **12.21**  
Storm Trysail **13.51**

**Owner**

<b>BOAT</b>	
Name <b>WINGS</b>	Sail Nr <b>USA 68750</b>
File <b>US6738</b>	Data in <b>meters/kilograms</b>

<b>RIG</b>	
Forestay Tension <b>Aft</b>	Spreaders <b>2</b>
Inner Stay <b>None Fitted</b>	Runners/Checkstays <b>0</b>
Carbon Mast <b>Yes</b>	Jib Furler <b>No</b>
Fiber Rigging <b>No</b>	Main Furler <b>No</b>
Non-Circular Rigging <b>No</b>	
Articulated Bowsprit <b>No</b>	

P <b>15.240</b>	E <b>5.065</b>	MDT1 <b>0.112</b>	MW <b>0.246</b>
IG <b>15.623</b>	J <b>4.673</b>	MDL1 <b>0.208</b>	GO <b>0.246</b>
ISP <b>17.050</b>	SFJ <b>0.135</b>	MDT2 <b>0.100</b>	BD <b>0.215</b>
BAS <b>1.553</b>	SPL	MDL2 <b>0.194</b>	MWT <b>186.00</b>
FSD <b>0.040</b>	TPS <b>7.005</b>	TL <b>1.050</b>	MCG <b>6.405</b>

<b>INCLINING TEST AND FREEBOARDS</b>			
Inclining Test <b>Boom Inclining</b>	LCFD <b>7.033</b>		
Flotation date <b>10/01/2021</b>	SG <b>1.0170</b>		
FFM <b>1.329</b>	FF <b>1.331</b>	SFFP <b>1.000</b>	
FAM <b>0.904</b>	FA <b>0.908</b>	SAFP <b>12.144</b>	
W1 <b>143.7</b>	PD1 <b>273.9</b>	WD <b>4.767</b>	
W2 <b>143.7</b>	PD2 <b>274.7</b>	GSA <b>1.0</b>	
W3 <b>143.7</b>	PD3 <b>279.9</b>	RSA <b>1.0</b>	
W4 <b>143.7</b>	PD4 <b>276.4</b>	PLM <b>9000.0</b>	
LCF from stem on CL / on sheer		<b>6.859 / 7.104</b>	
Maximum beam station from stem		<b>7.924</b>	
RM Measured		<b>195.3kg-m</b>	
RM Default		<b>173.7kg-m</b>	
Limit of positive stability / Stab.Index		<b>118.4° / 119.5</b>	
Freeboard at mast at 4.808		<b>1.138</b>	



**2020**  
IMS Measurement  
Certificate

<b>MIZZEN RIG AND SAILS</b>	
N/A	

<b>PROPELLER</b>			
Installation <b>Strut</b>	PRD <b>0.432</b>		
Type <b>Folding 2 blades</b>	PBW <b>0.115</b>		
Twin Screw <b>No</b>	PIPA <b>0.0035</b>		
ST1 <b>0.040</b>	ST3 <b>0.180</b>	ST5 <b>0.240</b>	
ST2 <b>0.180</b>	ST4 <b>0.110</b>	EDL <b>2.250</b>	

<b>Certificate</b>	
Number <b>US6738</b>	
ORC Ref <b>03410000TRD</b>	
Issued On <b>15/01/2021</b>	
VPP Ver. <b>2020 1.02</b>	
Valid until <b>31/01/2021</b>	

<b>COMMENTS</b>	
Cushions on board No water ballast	

<b>MOVABLE BALLAST</b>	
N/A	

<b>CENTERBOARD</b>	
N/A	



<b>SAILS (Maximum Areas)</b>									
Mainsail	MHB	MUW	MTW	MHW	MQW	Area	Area (r)	Formula	
	0.40	1.32	2.11	3.29	4.21	47.15	48.14	P/8 · (E + 2·MQW+ 2·MHW + 1.5·MTW + MUW + 0.5·MHB)	
Symmetric Not Available									
Asymmetric on centerline	SLU	SLE	SL	SHW	SFL	Area	Formula		
	19.70	17.00	18.35	10.93	10.90	167.05	AS · (SFL + 4·SHW) / 6		

<b>HEADSAILS</b>												
Area = 0.1125·HLU · (1.445·HLP + 2·HQW + 2·HHW + 1.5·HTW + HUW + 0.5·HHB)												
<b>HBB</b>	<b>HUW</b>	<b>HTW</b>	<b>HHW</b>	<b>HQW</b>	<b>HLP</b>	<b>HLU</b>	<b>Area</b>	<b>Btn</b>	<b>Flying</b>	<b>Meas.Date</b>	<b>Material</b>	<b>Comment</b>
0.15	0.83	1.51	2.70	3.85	4.92	15.45	40.64	Y	No			
0.12	0.70	1.31	2.41	3.50	4.53	14.40	34.17	Y	No		Unknow	
0.08	0.56	1.07	2.07	3.06	3.99	14.80	30.36	Y	No		Unknow	

<b>MEASUREMENT INVENTORY</b>				
Measurer				
Date <b>10/01/2021</b>				
Comment				
<b>Internal Ballast total = 0.0</b>				
<b>Id</b>	<b>Item</b>	<b>Weight</b>	<b>Distance</b>	<b>VCG Description</b>
<b>Id</b>	<b>Item</b>	<b>Maker</b>	<b>Model</b>	
1	Engine	Yanmar	3YM 30ACE	
<b>Id</b>	<b>Item</b>	<b>Weight Description</b>		


<b>MEASUREMENT INVENTORY</b>								
<b>Id</b>	<b>Item</b>	<b>Tank Use</b>	<b>Tank Type</b>	<b>Capcty</b>	<b>Dist.</b>	<b>VCG</b>	<b>Condtn</b>	<b>Description</b>
3	Tank Fuel		PVC	90.0	9.60	0.00	<del>22.0</del>	centerline
2	Tank Waste		PVC	50.0	10.30	0.40	<del>0.0</del>	Stbd outboard
1	Tank Water		Bladder	110.0	0.71	0.00	<del>0.0</del>	Port settee
<b>Id</b>	<b>Item</b>	<b>Weight</b>	<b>Distance</b>	<b>VCG Description</b>				
2	Battery	35.0	5.62	0.00 12V AGM engine, DCM 0100, stbd settee				
1	Battery	70.0	4.92	0.00 2x 12V AGM house, DCM 0100, stbd settee				
1	Misc	15.0	6.10	0.10 Refrigerator compressor, port centerline				
2	Misc	20.0	6.70	0.40 Stove/oven, port side				
3	Misc	25.0	10.30	0.10 Hot water heater, centerline				



**ORC**

Offshore Racing Congress  
World leader in rating technology

**2020**  
Certificate Appendix  
Sail Plan

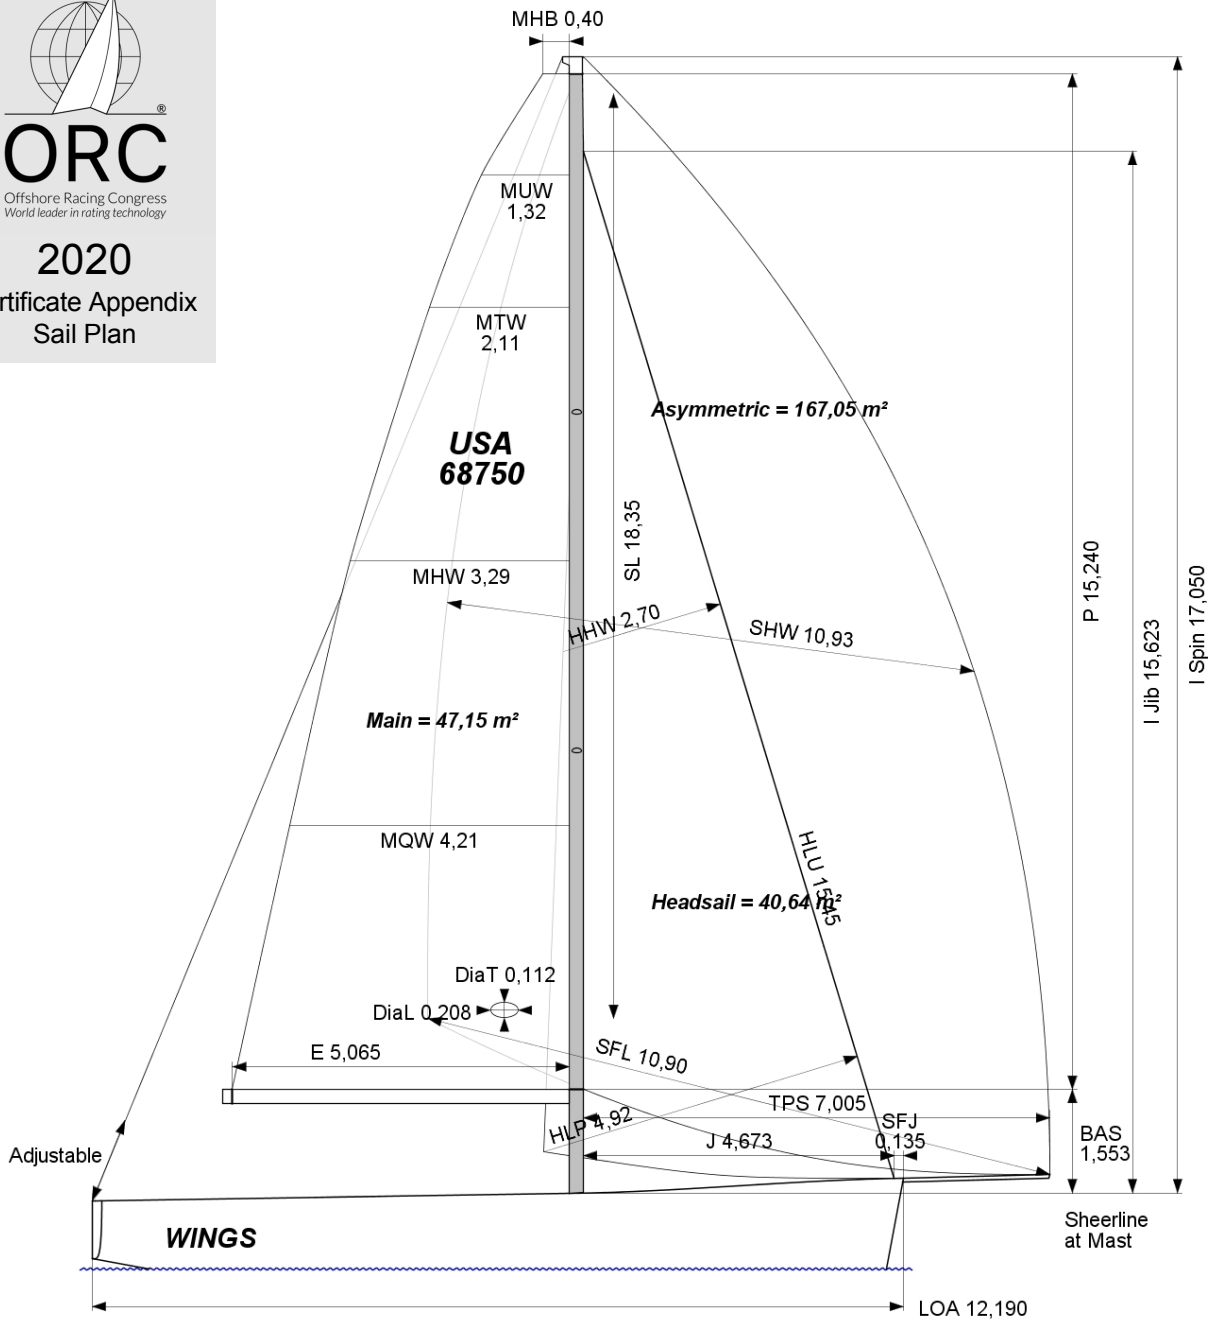

**SAILS INVENTORY**

**MAINSAIL (1)**

Id	MHB	MUW	MTW	MHW	MQW	Area	Measurer	Meas.Date	Manufacture	Material	Comment
1	0.40	1.32	2.11	3.29	4.21	47.15					

**HEADSAILS (3)**

Id	HHB	HUW	HTW	HHW	HQW	HLP	HLU	Ovrlp	Area	Btn	Flying	Measurer	Meas.Date	Manufacture	Material	Comment
AP1	0.15	0.83	1.51	2.70	3.85	4.92	15.45	105%	40.64	Y	No					
J3+	0.12	0.70	1.31	2.41	3.50	4.53	14.40	97%	34.17	Y	No					Unknow
J4	0.08	0.56	1.07	2.07	3.06	3.99	14.80	85%	30.36	Y	No					Unknow

**SYMMETRIC SPINNAKERS (0)**

Id	SLU	SLE	SL	SHW	SFL	Area	Measurer	Meas.Date	Manufacture	Material	Comment
----	-----	-----	----	-----	-----	------	----------	-----------	-------------	----------	---------

**ASYMMETRIC SPINNAKERS (2)**

Id	SLU	SLE	SL	SHW	SFL	Area	Kind	Measurer	Meas.Date	Manufacture	Material	Comment
A2	19.70	17.00	18.35	10.93	10.90	167.05	asym					
Code 0	17.35	15.99	16.67	5.48	7.30	81.19	asy76					Unknown