

BOAT Name Rigadoon Sail Nr 103	GPH 459.4	HULL Length Overall 13.550m Maximum Beam 4.290m Displacement 5,148kg Draft 3.199m Plan Review IMS Reg. Division Performance Dynamic Allowance 0.000% Hull Construction Carbon, Aramid Carbon Rudder Yes Crew Arm Extension
GENERAL Class DUNNING 44 Designer Dunning Builder McConaghy Series 10/2019 Age 06/2020 Age Allowance 0.033% Offset File dunning44.off - 22/09/2020 08:40:50 Measurement by - 10/09/2020		IMSL 13.416m VCGD -0.856m Sink 26.00kg/mm RL 13.953m VCGM -0.856m WS 32.82m² LSM0 13.136m Displacement/Length ratio 2.2712



2020
ORC International
Certificate

Rating Office

Offshore
Racing
Congress

COPY ONLY
Invalid for
RACING

World Leader In Rating Technology

SCORING OPTIONS						
	COASTAL / LONG DISTANCE			WINDWARD / LEEWARD		
Time on Distance	450.9			512.9		
Time on Time	1.3306			1.3161		
Triple Number	Low	Medium	High	Low	Medium	High
Time on Distance	519.1	412.5	353.3	679.1	521.9	440.6
Time on Time	1.3003	1.6365	1.9105	0.9940	1.2934	1.5320

TIME ALLOWANCES							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat VMG	751.5	629.2	586.3	565.3	548.3	537.3	532.5
52°	490.1	427.7	410.0	399.7	392.1	379.6	368.7
60°	456.7	413.0	393.4	380.1	371.2	360.2	345.0
75°	426.6	394.4	367.7	350.1	339.1	331.2	309.1
90°	419.4	377.0	348.9	330.4	314.5	302.6	287.9
110°	433.2	390.7	347.6	311.9	290.7	274.2	249.8
120°	458.2	409.2	362.4	328.6	293.4	266.3	235.1
135°	539.4	431.8	387.2	342.2	300.7	273.2	233.9
150°	648.5	508.1	436.9	389.8	352.5	311.1	245.9
Run VMG	748.8	586.7	504.5	454.7	407.0	359.3	283.9

Certificate

Number **US6720**
ORC Ref **03410000R1Q**
Issued On **30/09/2020**
VPP Ver. **2020 1.02**
Valid until **31/12/2020**

Crew Weight

Default **1,016kg**
Maximum **878kg**
Minimum* **659kg**
**when applied by the NoR and SI*
Non Manual Pwr **No**

Special Scoring

	ToD	ToT
Non Spin GPH	499.4	1.2014
Non Spin OSN	490.4	1.2236

Selected Courses							
Windward / Leeward	750.2	608.0	545.4	510.0	477.6	448.3	408.2
Circular Random	626.2	510.1	447.3	408.7	382.0	361.7	331.4
Coastal / Long Distance	750.0	571.8	489.4	435.6	396.4	360.7	308.8
Non Spinnaker	692.9	558.8	485.2	440.1	409.4	386.8	353.6

Sails Limitations

Headsails	Spinnakers
7	5

Velocity Prediction in Knots for True Wind Speeds							
Wind Velocity	6 kt	8 kt	10 kt	12 kt	14 kt	16 kt	20 kt
Beat Angles	43.1°	40.5°	38.4°	37.9°	36.8°	36.0°	36.6°
Beat VMG	4.79	5.72	6.14	6.37	6.57	6.70	6.76
52°	7.35	8.42	8.78	9.01	9.18	9.48	9.76
60°	7.88	8.72	9.15	9.47	9.70	9.99	10.43
75°	8.44	9.13	9.79	10.28	10.62	10.87	11.65
90°	8.58	9.55	10.32	10.90	11.45	11.90	12.50
110°	8.31	9.21	10.36	11.54	12.38	13.13	14.41
120°	7.86	8.80	9.93	10.96	12.27	13.52	15.31
135°	6.67	8.34	9.30	10.52	11.97	13.18	15.39
150°	5.55	7.08	8.24	9.24	10.21	11.57	14.64
Run VMG	4.81	6.14	7.14	7.92	8.84	10.02	12.68
Gybe Angles	141.0°	142.0°	148.3°	151.5°	144.0°	144.5°	144.0°

Class Division Length

CDL = **13.682**

Storm Sails Areas

Heavy Weather Jib **44.95**
Storm Jib (JL=11.87) **16.65**
Storm Trysail **20.44**

Owner

BOAT	
Name Rigadoon	Sail Nr 103
File US6720	Data in meters/kilograms

RIG			
Forestay Tension	Aft & Forward	Spreaders 2	
Inner Stay	None Fitted	Runners/Checkstays 1	
Carbon Mast	Yes	Jib Furler	
Fiber Rigging	Yes	Main Furler	
Non-Circular Rigging			
Articulated Bowsprit			
P 18.715	E 6.239	MDT1 0.131	MW 0.273
IG 18.163	J 5.474	MDL1 0.298	GO 0.298
ISP 20.523	SFJ 0.540	MDT2 0.103	BD 0.355
BAS 1.943	SPL	MDL2 0.160	MWT
FSD 0.037	TPS 8.063	TL 4.235	MCG

INCLINING TEST AND FREEBOARDS			
Inclining Test Current Inclining			
Flotation date 10/09/2020		SG 1.0240	
FFM 0.221	FF 0.221	SFFP 0.193	
FAM 0.045	FA 0.045	SAFP 13.550	
W1 122.6	PD1 485.7	WD 12.337	
W2 122.6	PD2 485.7	GSA 1.0	
W3 122.6	PD3 485.7	RSA 1.0	
W4 122.6	PD4 485.7	PLM 9000.0	
LCF from stem on CL / on sheer		7.488 / 7.816	
Maximum beam station from stem		11.053	
RM Measured		245.2kg-m	
RM Default		228.0kg-m	
Limit of positive stability / Stab.Index		132.9° / 130.2	
Freeboard at mast at 6.014		1.252	



2020
IMS Measurement
Certificate

MIZZEN RIG AND SAILS	
N/A	

PROPELLER			
Installation	Strut	PRD	0.480
Type	Folding 2 blades	PBW	0.103
Twin Screw		PIPA	0.0037
ST1	0.041	ST3	0.180
ST2	0.180	ST4	0.110
		ST5	0.300
		EDL	0.702

Certificate	
Number	US6720
ORC Ref	03410000R1Q
Issued On	30/09/2020
VPP Ver.	2020 1.02
Valid until	31/12/2020

COMMENTS

MOVABLE BALLAST	
N/A	

CENTERBOARD	
N/A	



SAILS (Maximum Areas)									
Mainsail	MHB	MUW	MTW	MHW	MQW	Area	Area (r)	Formula	
	1.55	2.20	3.03	4.33	5.37	77.60	79.55	P/8 · (E + 2·MQW + 2·MHW + 1.5·MTW + MUW + 0.5·MHB)	
Symmetric Not Available									
Asymmetric on centerline	SLU	SLE	SL	SHW	SFL	Area	AS · (SFL + 4·SHW) / 6		
	23.28	20.02	21.65	12.50	12.86	226.82			


HEADSAILS												
Area = 0.1125·HLU · (1.445·HLP + 2·HQW + 2·HHW + 1.5·HTW + HUW + 0.5·HHB)												
HHB	HUW	HTW	HHW	HQW	HLP	HLU	Area	Btn	Flying	Meas.Date	Material	Comment
0.08	1.53	2.98	5.55	7.40	8.64	22.06	110.24		Yes	01/06/2020	Unknow	OUS136877-006
0.09	0.91	1.60	2.96	4.30	5.60	19.07	55.71		No	22/05/2020	Unknow	OUS136877-002



ORC

Offshore Racing Congress
World leader in rating technology

2020
Certificate Appendix
Sail Plan

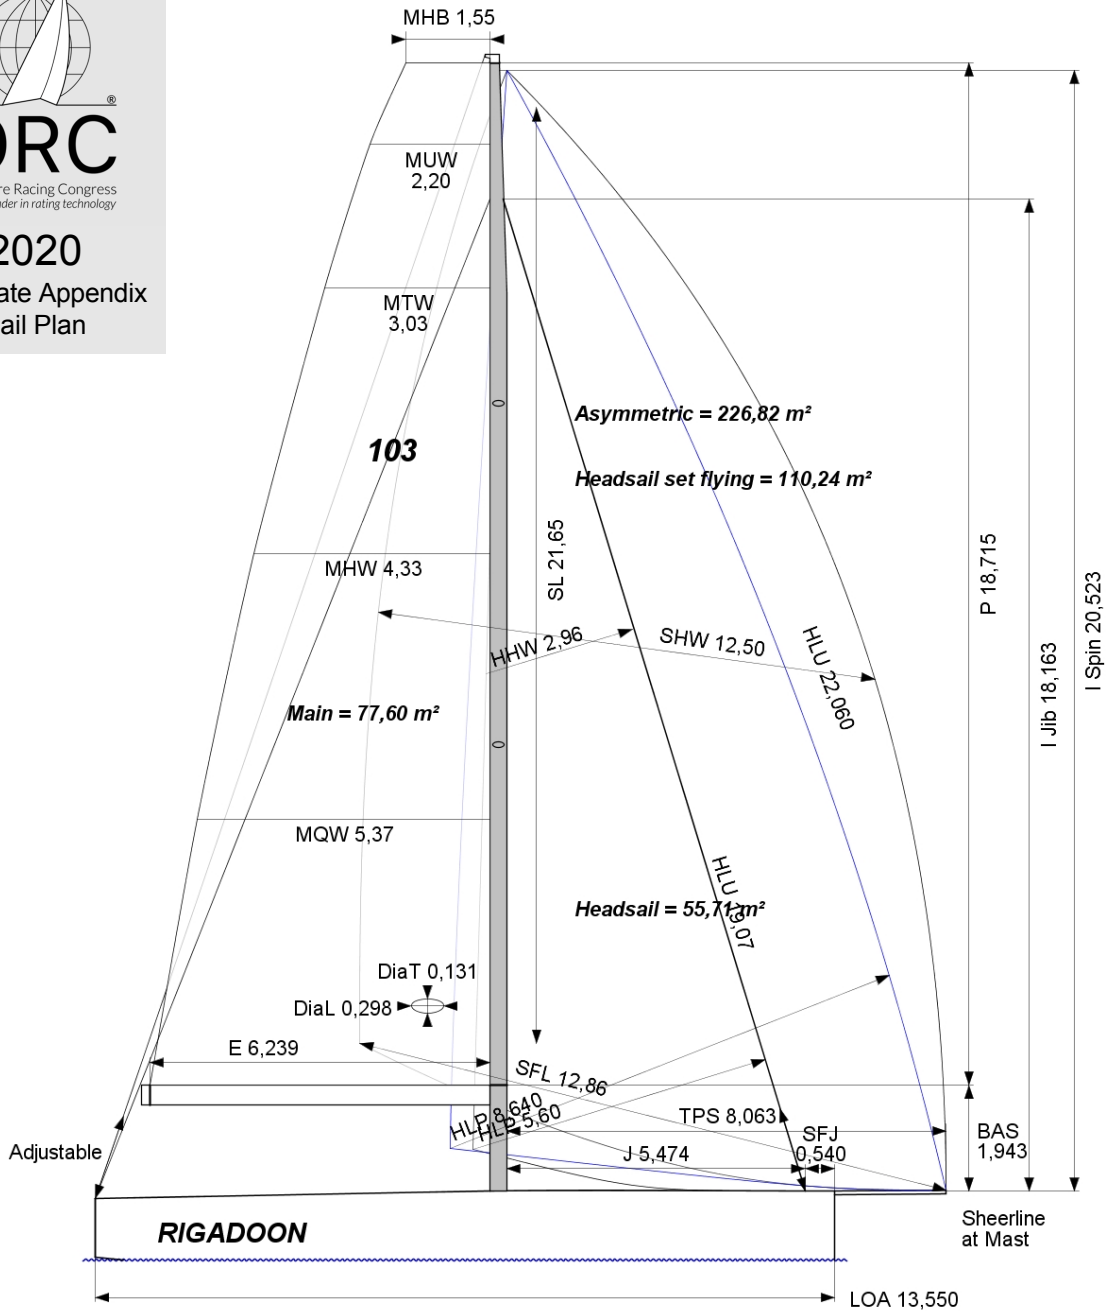

SAILS INVENTORY

MAINSAIL (1)																
Id	MHB	MUW	MTW	MHW	MQW	Area	Measurer	Meas.Date	Manufacture	Material	Comment					
MS 2020	1.55	2.20	3.03	4.33	5.37	77.58		27/05/2020	NORTH	Unknown	OUS136877-001					
HEADSAILS (2)																
Id	HHB	HUW	HTW	HHW	HQW	HLP	HLU	Ovrlp	Area	Btn	Flying	Measurer	Meas.Date	Manufacture	Material	Comment
CODE	0.08	1.53	2.98	5.55	7.40	8.64	22.06	158%	110.24		Yes		01/06/2020	NORTH	Unknow	OUS136877-006
J1	0.09	0.91	1.60	2.96	4.30	5.60	19.07	102%	55.71		No		22/05/2020	NORTH	Unknow	OUS136877-002
SYMMETRIC SPINNAKERS (0)																
Id	SLU	SLE	SL	SHW	SFL	Area	Measurer	Meas.Date	Manufacture	Material	Comment					
ASYMMETRIC SPINNAKERS (1)																
Id	SLU	SLE	SL	SHW	SFL	Area	Kind	Measurer	Meas.Date	Manufacture	Material	Comment				
2020 A2	23.28	20.02	21.65	12.50	12.86	226.82	asym		29/09/2020	NORTH	Unknown					